

Village of Genoa, Ohio

Brent H. Huston, Mayor
Kevin M. Gladden, Village Administrator

2023 GENOA PAVING PROGRAM, CASTLE RIDGE, PHASE I

Addendum #1, February 8, 2023

QUESTION: Regarding item 11 Monument Assembly, Ty 1 or Ty 2, is the intent to replace the monument with a monument similar to the existing monument? If not, please provide a standard drawing for the monument assembly that is requested.

ANSWER: It is the intent of the project to replace the monuments with a monument similar to the existing monuments. Detail provided on the next page. Attached to this addendum is a new bid sheet, replacing "Monument Assembly, Ty 1 or Ty 2" with "Monument Assembly, As Per Plan."

QUESTION: Kevin, my question pertains to the Ty 1 surface quantity. When doing my takeoff, I am coming up with quite a bit less quantity on surface. I see in plans the area calcs. to 5354 sy. With the proposed depth at 1.25", it comes up to roughly 375 ton. Is this a miss calculation or is the village just adding in addition quantity for over runs?

ANSWER: The updated bid sheet will use 372 tons. The Program originally included some alley paving, which was removed from the scope of work, but the Type 1 amount was left in error.


Please remove the original bid sheet and replace it with this updated Bid Sheet in your bid packet. Please include the first two pages of this addendum in your bid packet, as pages 54 and 55. Inclusion of this addendum in the bid packet will be considered acknowledgement of the addendum.

The bid letting will remain February 13, 2023 at 11:00 AM.



Kevin M. Gladden
Village Administrator

MONUMENT DETAIL

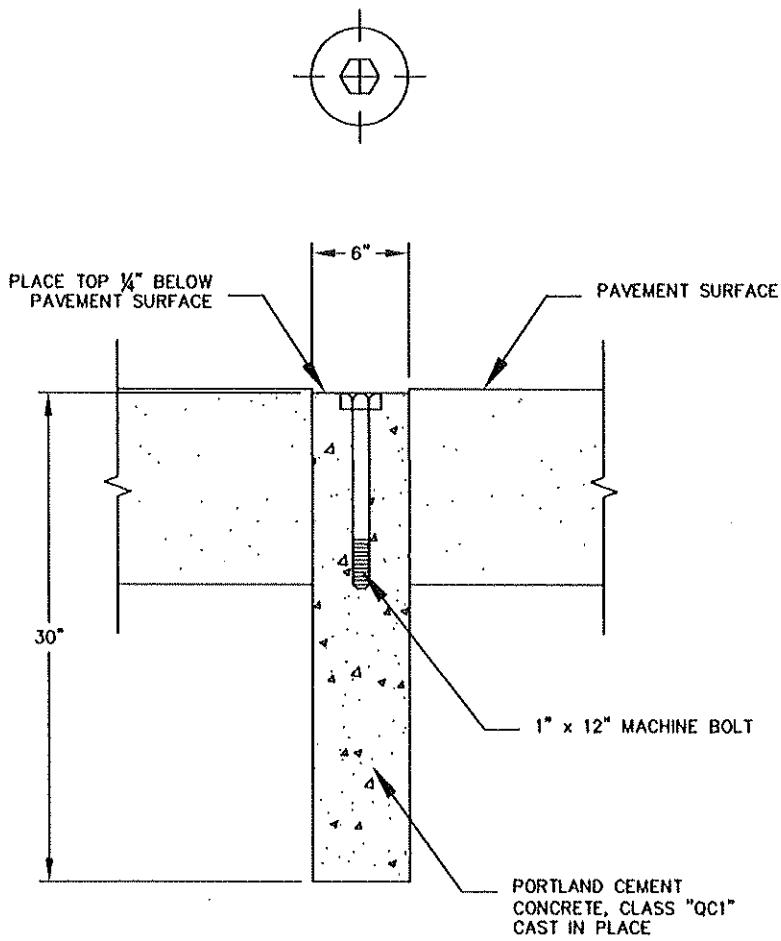

CONCRETE MONUMENT

A CYLINDRICAL CONCRETE MARKER AS DESCRIBED UNDER TYPE A EXCEPT THAT A MACHINE TYPE IRON BOLT (WITHOUT NUT) OF ONE (1") INCH IN DIAMETER BY TWELVE (12") INCHES IN LENGTH SHALL BE PLACED IN A VERTICAL POSITION WITH THE HEAD OF THE BOLT UPWARD AND LEVEL WITH THE SURFACE OF THE PAVEMENT. A POINT SHALL BE MARKED ON THE HEAD OF THE BOLT TO INDICATE THE EXACT POINT REFERRED TO ON THE FINAL PLAT.

PROPOSAL

Project: 2023 GENOA PAVING PROGRAM, CASTLE RIDGE PHASE I

Date of Letting: February 13, 2023

Completion Date: September 15, 2023

2023 GENOA PAVING PROGRAM, CASTLE RIDGE PHASE I						
Item	ODOT Ref	Item Description	Quantity	Unit	Unit Price	Total Price
1	202	MONUMENT ASSEMBLY REMOVED	7	EA		
2	203	EXCAVATION (16.5')	1,172	CY		
3	204	SUBGRADE COMPACTION	2,557	SY		
4	254	PAVEMENT PLANING, AS PER PLAN (AVERAGE DEPTH 0.63")	2,057	SY		
5	301	ASPHALT CONCRETE BASE, PG 64-22 (4.50")	639	TON		
6	304	AGGREGATE BASE (12" PLACED IN TWO 6" COURSES)	1,704	TON		
7	407	NON-TRACKING TACK COAT	856	GAL		
8	441	ASPHALT CONCRETE, SURFACE COURSE, TYPE 1 (449), PG64-22 (1.25")	372	TON		
9	441	ASPHALT CONCRETE, INTERMEDIATE COURSE, TYPE 1 (449), PG64-22 (0.50")	149	TON		
10	614	MAINTAINING TRAFFIC	1	LS		
11	623	MONUMENT ASSEMBLY, AS PER PLAN	7	EA		
12	623	MONUMENT SURVEYING	1	LS		
13	624	MOBILIZATION	1	LS		
TOTAL:						